



Cutting tool POT-40va

Pneumatic Oscillating tool for higher cutting performance at less noise and vibration

The powerful and durable POT-40va is a further development of the well proven POT-40 oscillating tool.

typical materials / applications:

insole material, sole leather, rubber, padding material, insulation material, carpet, foam, cardboard, die board rubber, corrugated board, foam board, gasket material, cork

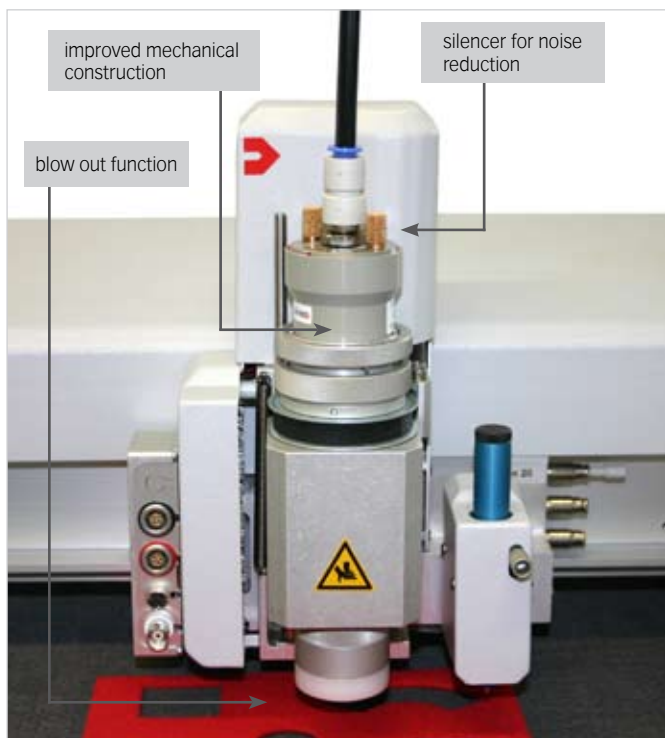

Feature / specification	
frequency with 6 bar pressure	9000 cycle/min
frequency with 8 bar pressure	10200 cycle/min
noise level	approx. 75dB (idle running)
air connection	8mm tube
recommended air pressure	8 bar
stroke	8mm
Versions	
POT-40va for 0.6mm knives	
POT-40va for 1.5mm knives	

Option	
Knife reduction	1.5mm to 0.6mm:
intermediate ring	
Benefits	
reduction in noise emission compared to POT-40	
less vibration – resulting in higher cutting quality	
less mechanical wear – resulting in increased life-span	
no outgoing air tube necessary	
blow out function	

ZST-07-2008-mze

Headquarter
Zünd Systemtechnik AG
 Industriestrasse 8
 CH-9450 Altstätten
 T +41 71 757 81 00
 F +41 71 757 81 11
 info@zund.com
 www.zund.com

